

FIG.1

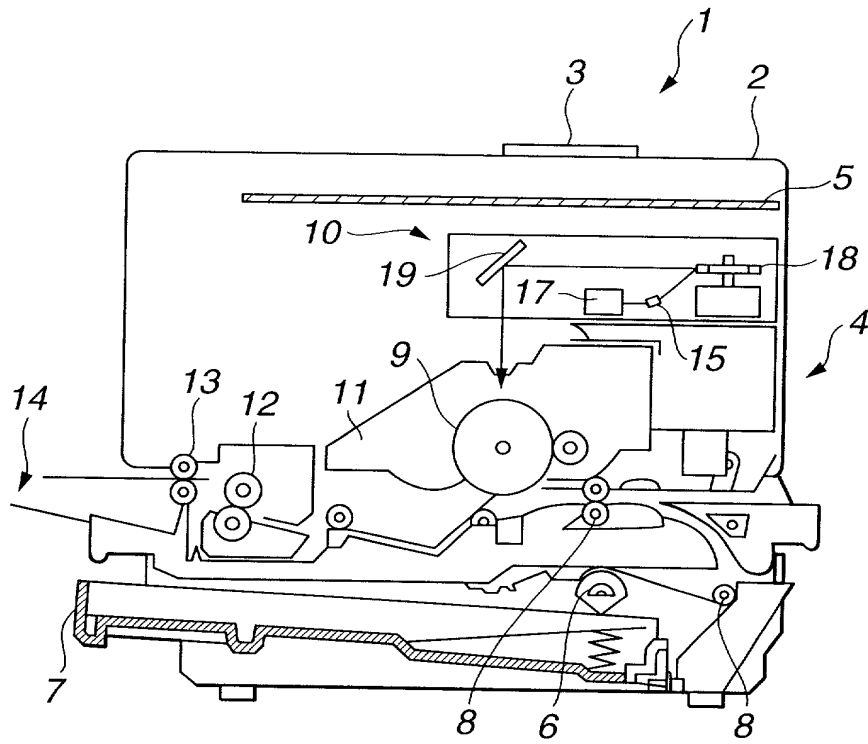


FIG.2

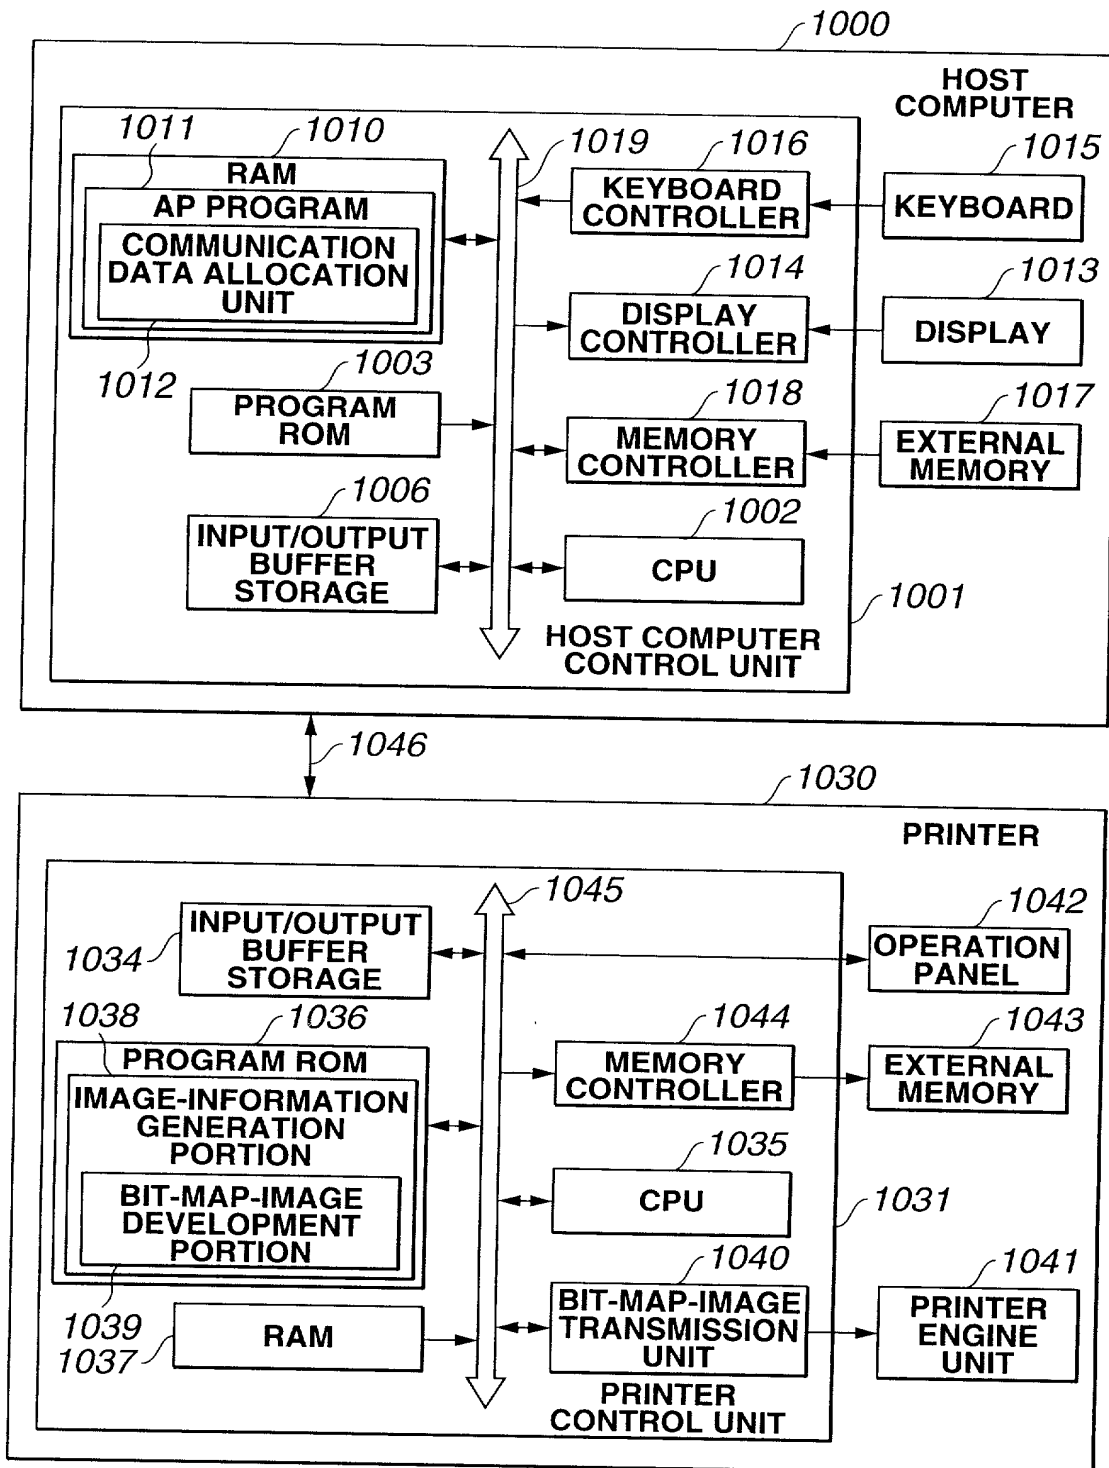


FIG.3

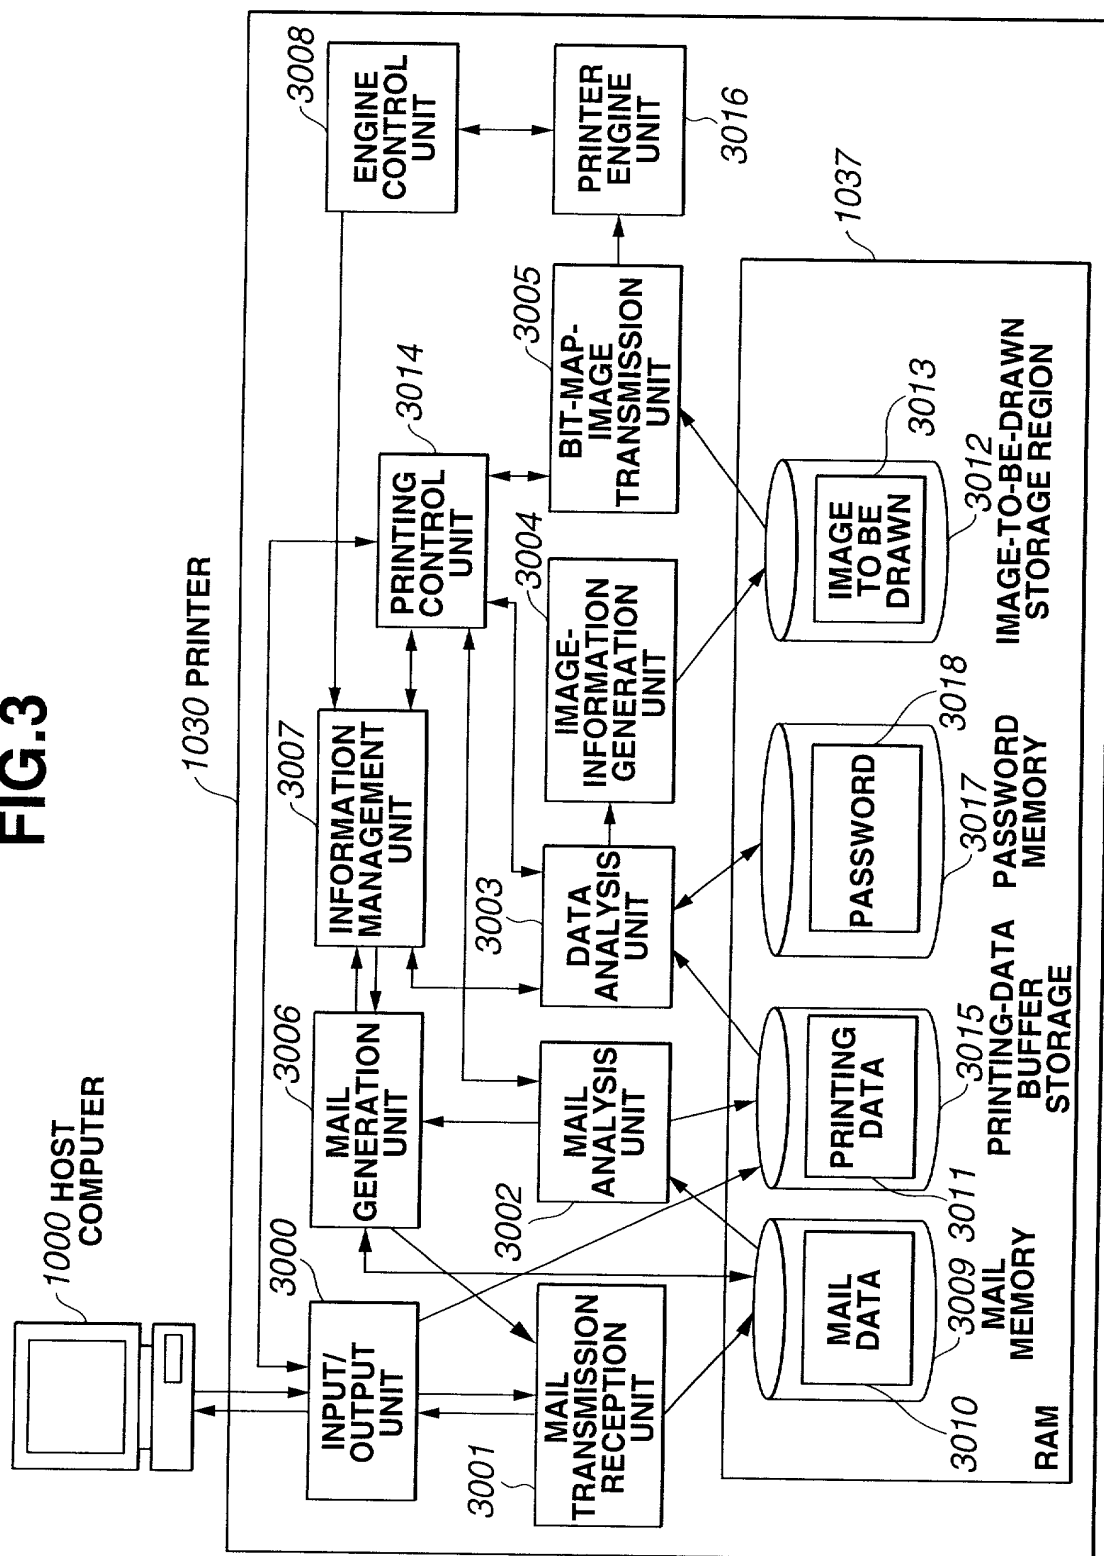


FIG.4

4001

COMMAND	DESCRIPTION
"PASSWORD"	DESCRIBE PASSWORD AFTER COMMAND. RECOGNIZE PORTION BEFORE LINE FEED AS PASSWORD. WHEN PASSWORD IS REGISTERED IN PRINTER, MAIL IS NOT ANALYZED UNLESS TWO PASSWORDS COINCIDE.
"PRINT-FILE"	PRINT ATTACHED FILE. DESCRIBE NAME AND DATA FORM OF FILE AFTER COMMAND.
"SET"	SET VARIOUS PRINTING-SETTING PARAMETERS. DESCRIBE NAMES OF SETTING ITEMS AND SETTING VALUES AFTER COMMAND.
"GET"	ACQUIRE VARIOUS PRINTING-SETTING PARAMETERS, LOG INFORMATION, EXPENDABLE-ITEM INFORMATION, AND THE LIKE. DESCRIBE INFORMATION NAME AFTER COMMAND. MAIL IS TRANSMITTED UPON PROVISION OF COMMAND.

FIG.5

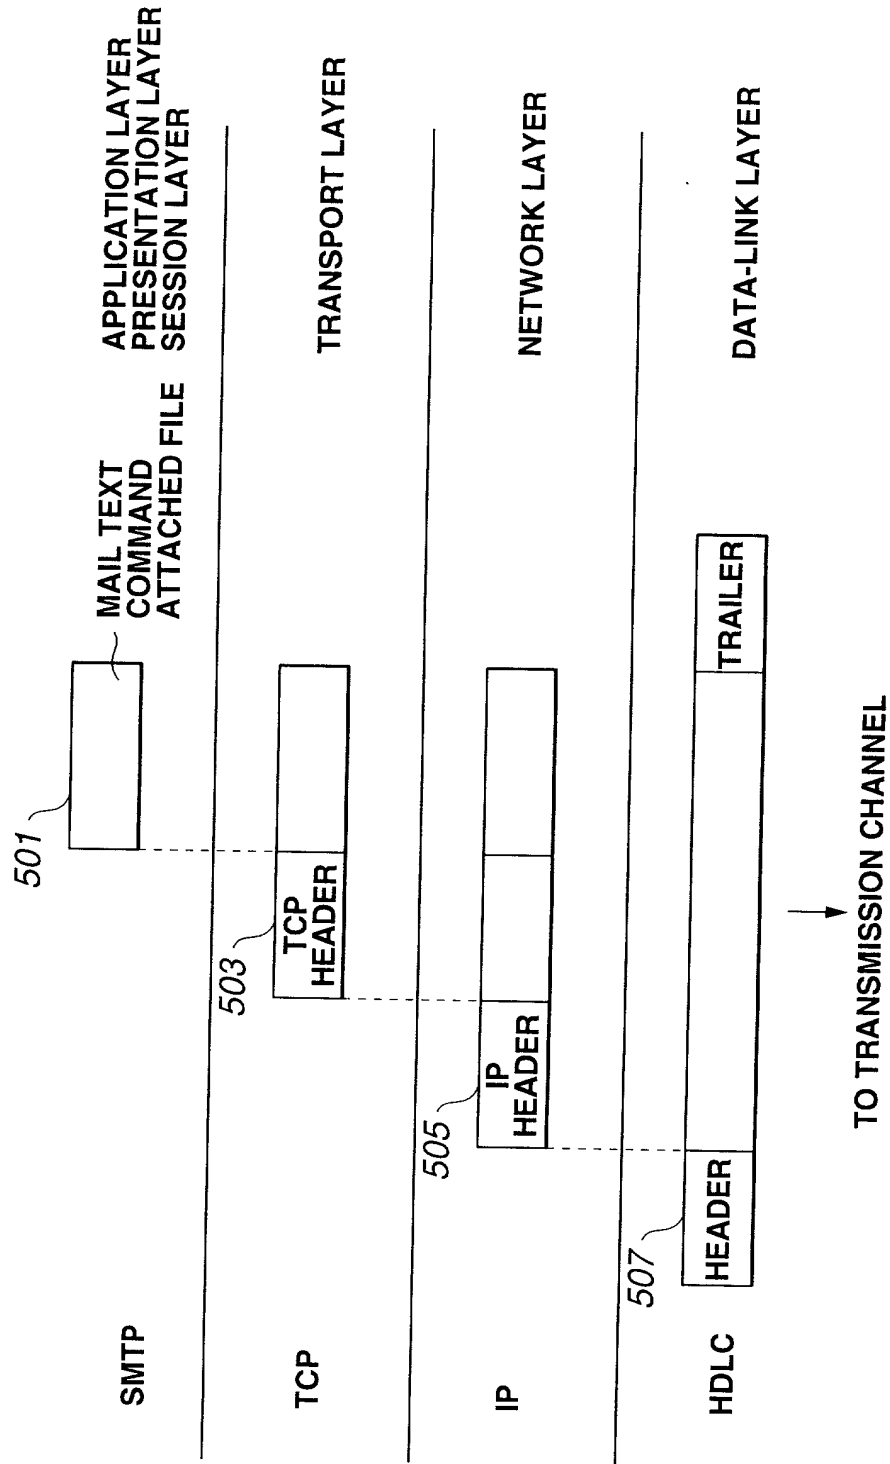


FIG.6

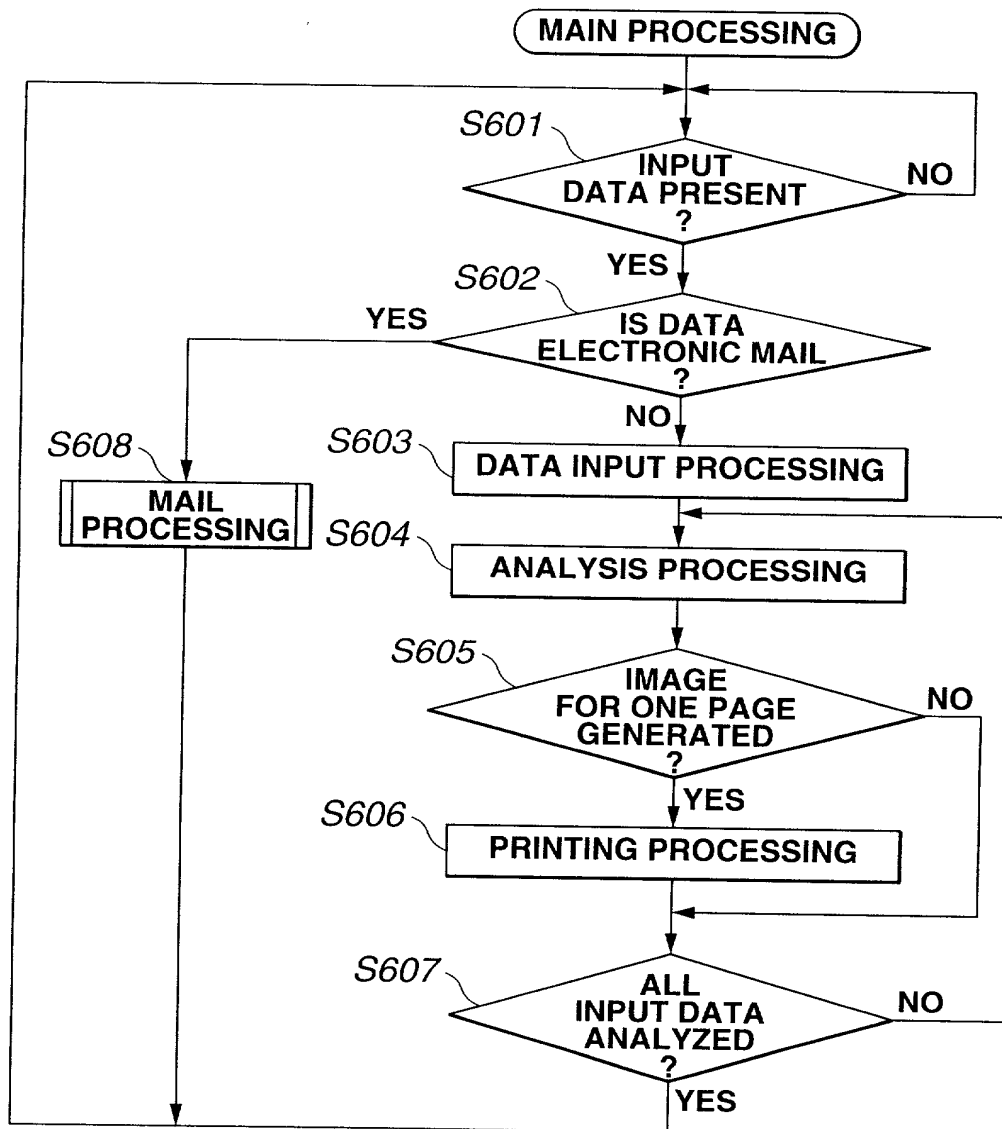


FIG.7

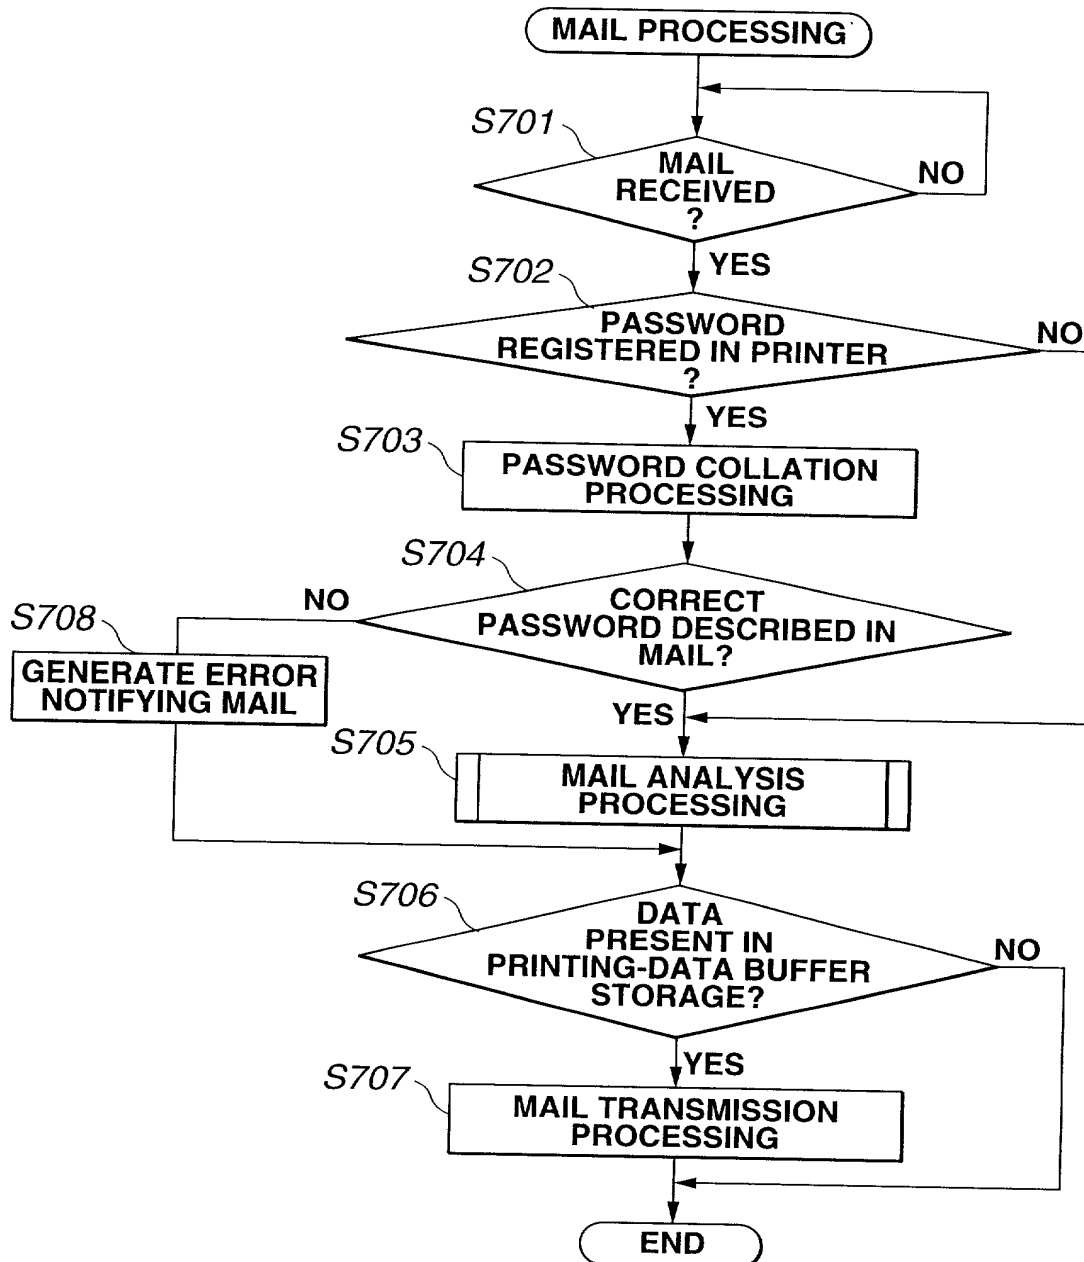


FIG.8

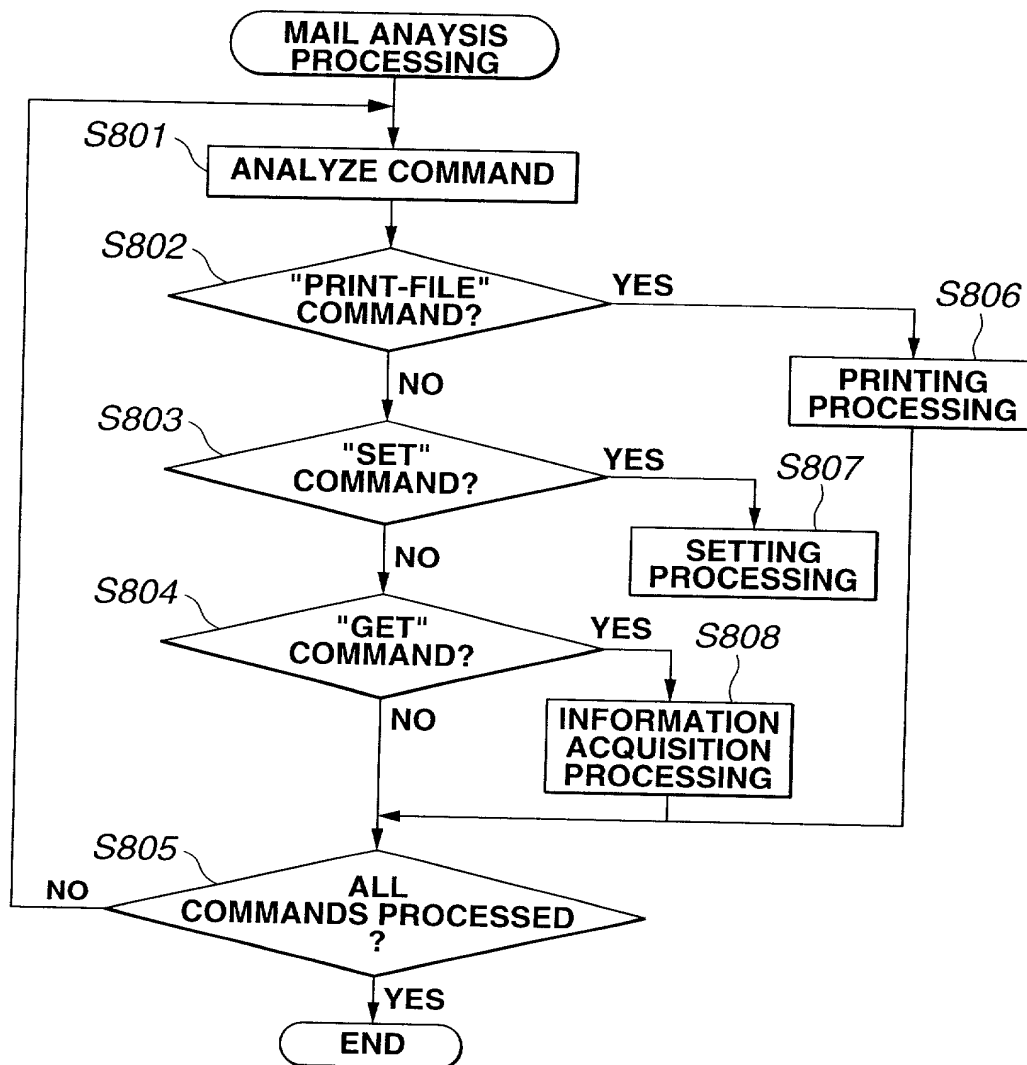


FIG.9A

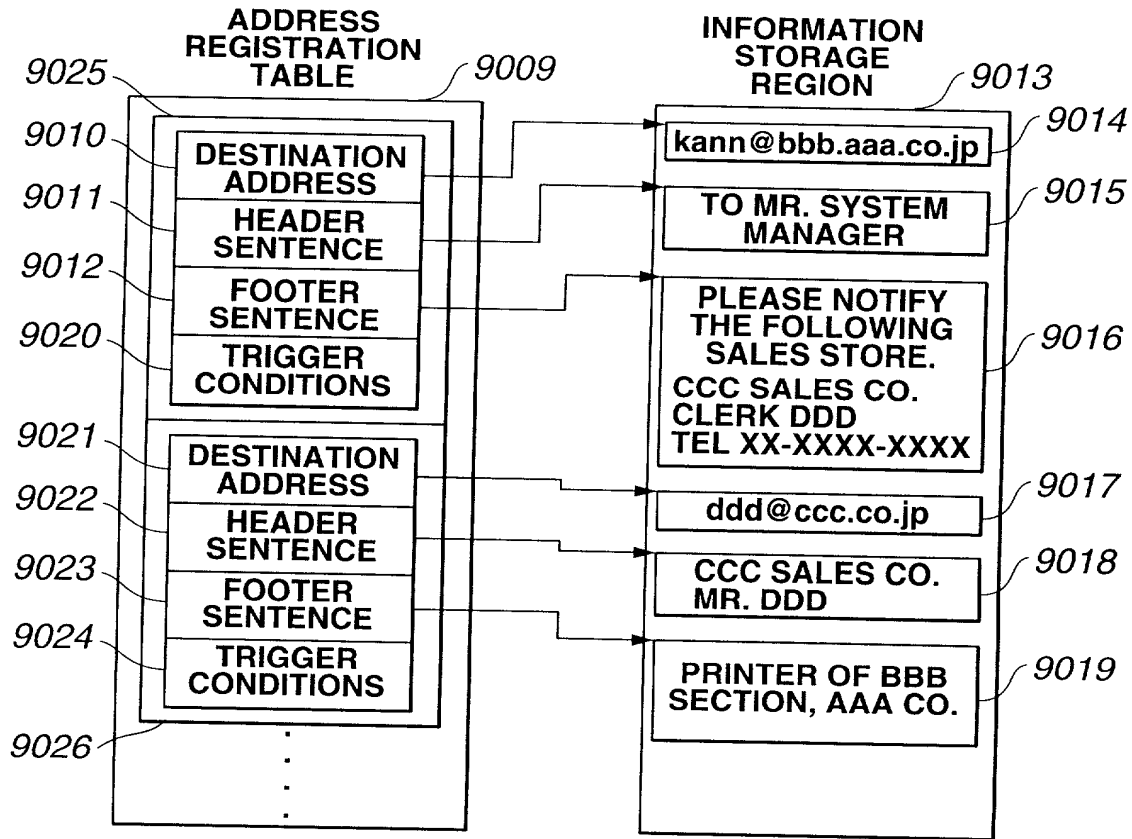


FIG.9B

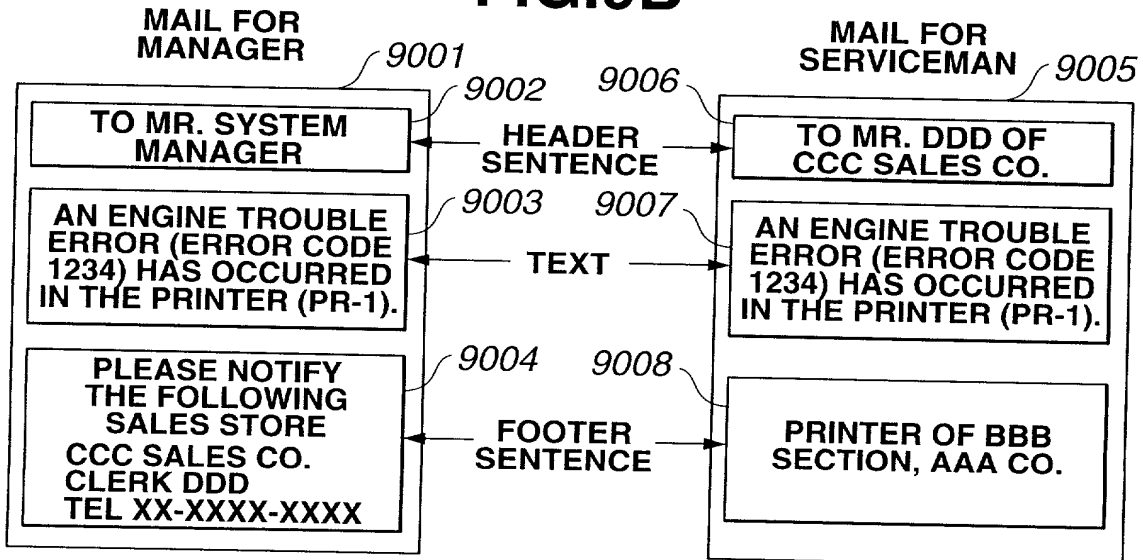


FIG.10

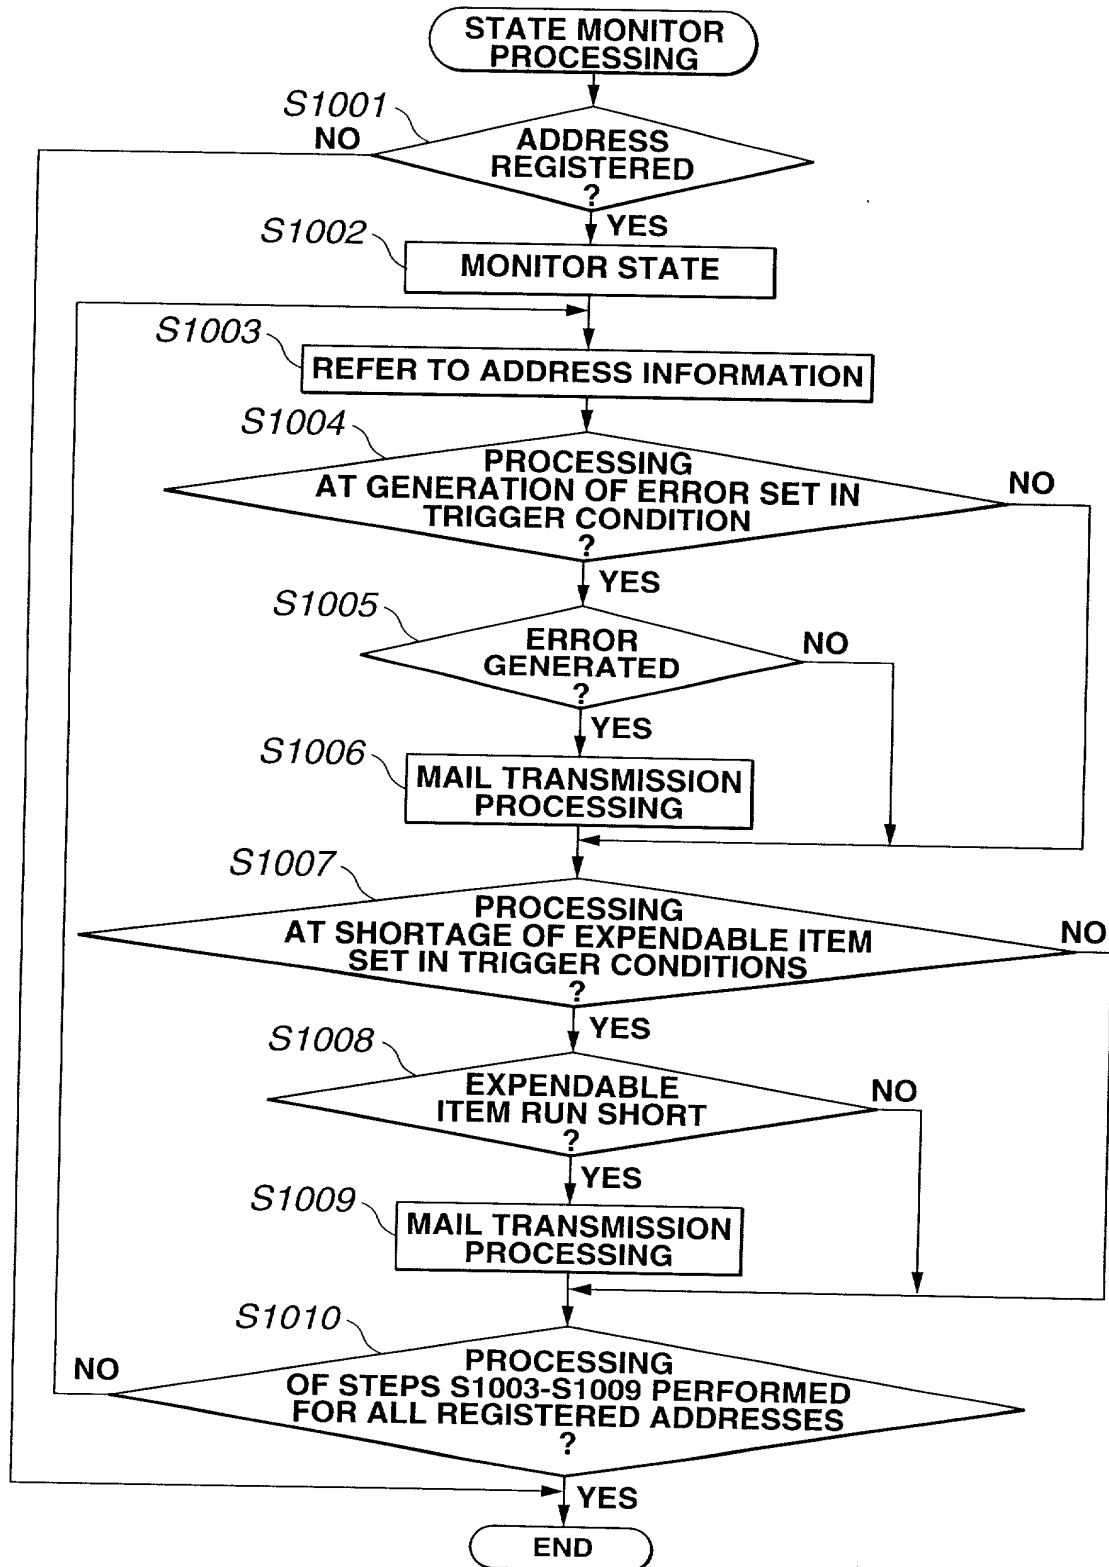


FIG.11

11001

ATTRIBUTE NAME	DESCRIPTION	EFFECTIVE RANGE	SETTING VALUE
NAME	NAME OF PRINTER	SETTING EFFECTIVE FOR PRINTER	CHARACTER STRING OF 16 ALPHANUMERIC CHARACTERS
SLEEPTIME	WAITING TIME UNTIL ENTERING SLEEP MODE (MIN)	SETTING EFFECTIVE FOR PRINTER	"OFF" 1~60
LANGUAGE	LANGUAGE DISPLAYED ON PANEL	SETTING EFFECTIVE FOR PRINTER	"JP" "EN"
COPY	SETTING OF NUMBER OF COPIES	SETTING EFFECTIVE FOR ATTACHED PRINTING DATA	1~999
DUPLEX	SETTING OF DUPLEX PRINTING	SETTING EFFECTIVE FOR ATTACHED PRINTING DATA	"ON" "OFF"
SORT	SETTING OF SORTING	SETTING EFFECTIVE FOR ATTACHED PRINTING DATA	"ON" "OFF"
STAPLE	SETTING OF STAPLING	SETTING EFFECTIVE FOR ATTACHED PRINTING DATA	"ON" "OFF"
NUP	SETTING OF N-UP PRINTING	SETTING EFFECTIVE FOR ATTACHED PRINTING DATA	1, 2, 4, 8
OVERLAY	OVERPLAY OF FORM DATA	SETTING EFFECTIVE FOR ATTACHED PRINTING DATA	CHARACTER STRING OF 16 ALPHANUMERIC CHARACTERS (FILE NAME)
STYLE	STYLE SHEET (IMAGE SETTING)	SETTING EFFECTIVE FOR ATTACHED PRINTING DATA	CHARACTER STRING OF 16 ALPHANUMERIC CHARACTERS (FILE NAME)

FIG.12

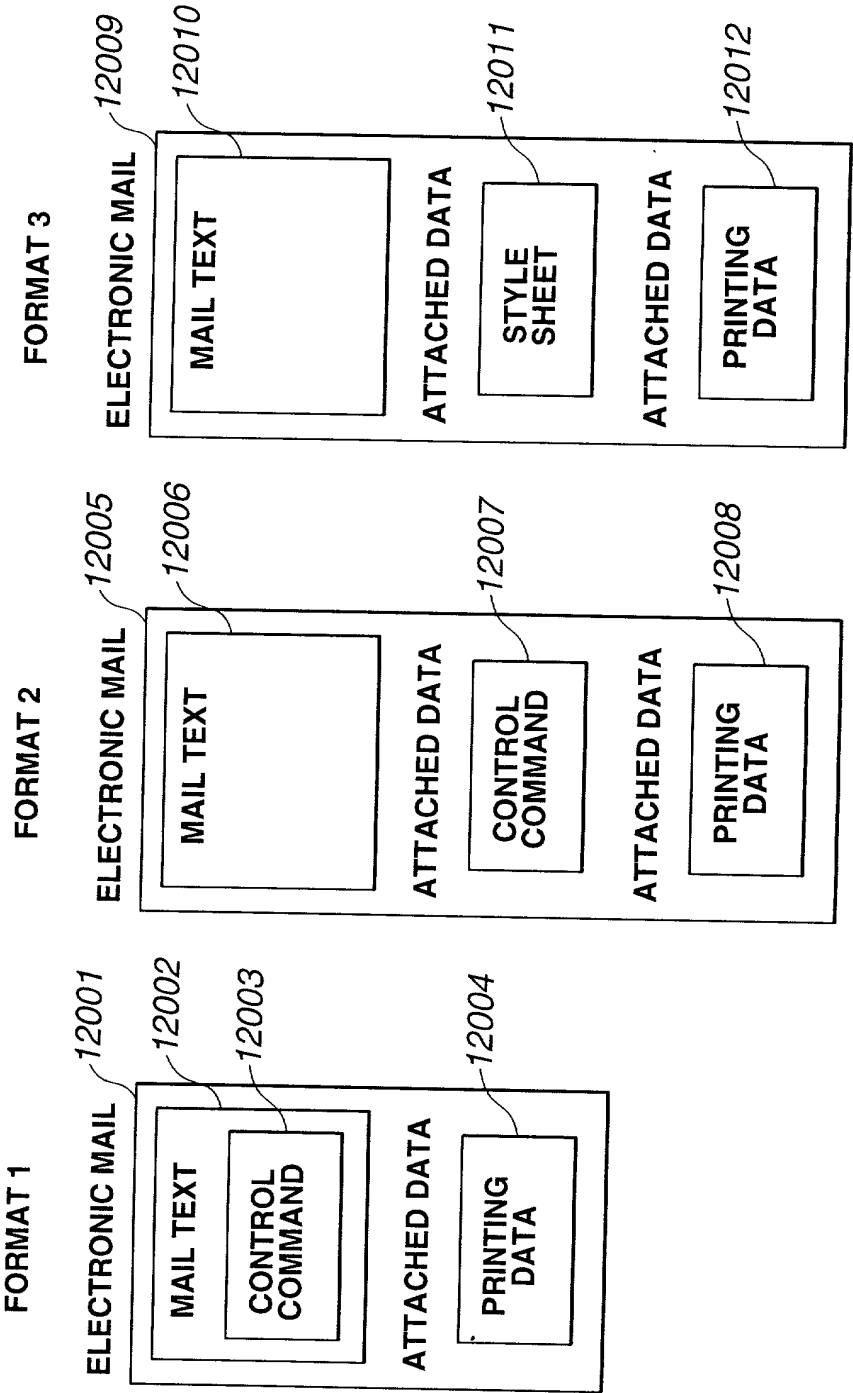


FIG.13

ELECTRONIC MAIL

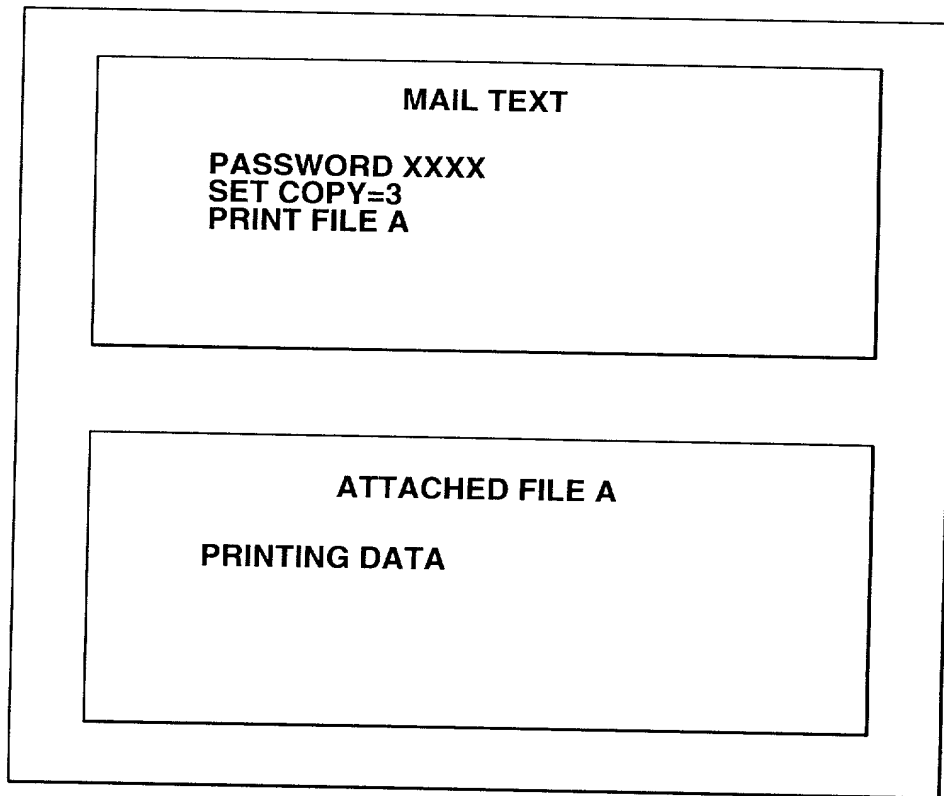


FIG.14

ELECTRONIC MAIL

The diagram illustrates an electronic mail interface within a rectangular frame. It consists of three vertically stacked rectangular boxes. The top box is labeled 'MAIL TEXT' and contains three lines of text: 'PASSWORD' followed by four circles, 'SET OVERLAY A', and 'PRINT FILE B'. The middle box is labeled 'ATTACHED FILE A' and contains the text 'FORM DATA'. The bottom box is labeled 'ATTACHED FILE B' and contains the text 'PRINTING DATA'.

MAIL TEXT

PASSWORD ○○○○
SET OVERLAY A
PRINT FILE B

ATTACHED FILE A

FORM DATA

ATTACHED FILE B

PRINTING DATA

FIG.15

ELECTRONIC MAIL

